

MAX

SuperFramer

CN890F3

ENGINEERED FOR
PERFORMANCE

DRIVES 2" TO 3 1/2" 15 DEGREE WIRE WELDED COIL NAILS



FRAMING COIL NAILER

MAX

ENGINEERED FOR PERFORMANCE

SuperFramer

CN890F3

BENEFITS

NEW EASY SWITCHABLE TRIGGER (ANSI COMPLIANT)

The tool comes from the factory with a sequential trigger installed and also includes a contact fire trigger in the carton box. No special tool is required to switch the trigger.

SELF CLEANING FILTER FOR EXTENDED DURABILITY

The patented, self-cleaning maintenance free end cap filter captures foreign substances before they can enter the tool and automatically ejects them when the air hose is disconnected.

SAFE AND EASY TOE NAILING


Pointy teeth on the contact arm allows users to get a firm grip when toe-nailing and also to avoid any rapid jerks or slipping during operation.

DEPENDABLE RAFTER HOOK

A heavy-duty rafter hook gives carpenters the convenience of hanging tool on rafters as they move around the job site.

APPLICABLE FASTENERS

Shank Type

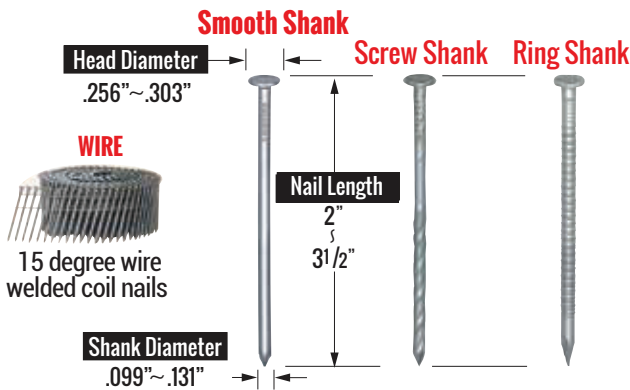

APPLICATIONS

Framing, Sheathing, Decking, Subflooring and Furring



FEATURES



- 1 DEPTH ADJUSTABLE DIAL
- 2 POINTY TEETH ON CONTACT ARM. AGGRESSIVE NOSE FOR TOE NAILING
- 3 NO-MAR CONTACT TIP
- 4 MAINTENANCE FREE END CAP FILTER
- 5 COMFORTABLE RUBBER GRIP
- 6 ULTRA LIGHTWEIGHT, (8.4 LBS.) SHORT HEIGHT DESIGN (13 1/2")
- 7 TANGLE FREE SWIVEL PLUG
- 8 DEPENDABLE RAFTER HOOK
- 9 EASY LOAD MAGAZINE
- 10 SEQUENTIAL FIRE TRIGGER

TOOL SPECIFICATIONS

Model	CN890F3
Weight	8.4 lbs.
Dimensions	(H×W×L): 13-1/2" × 5" × 13-5/8"
Load Capacity	300 Nails
Operating Pressure	70-100 psi (Regulator)
Air Consumption	0.11 ft ³ /cycle (100 ps Operating Pressure)

MAX

MAX USA CORP.

205 Express St., Plainview, NY 11803
Phone: 800.223.4293 fax: 516.741.3272
www.maxusacorp.com

All MAX products are protected by registered patents and design rights including trademarks. For details, please contact MAX.

DEALER: