

MAX

ENGINEERED FOR
PERFORMANCE

CONNECTED TWINTIER

TIES WIRE MESH x WIRE MESH
UP TO #7 x #7 WITH 19GA. WIRE



THE MOST INTELLIGENT TWINTIER EVER!

MAX

ENGINEERED FOR PERFORMANCE

CONNECTED TWINTIER

BENEFITS

NEW CONNECTED IoT TOOL

App features real-time tie counter which helps manage tie wire stock.

Tool Diagnostic View gives real-time status of tool condition and proactive preventive maintenance suggestions.

Geofencing feature makes this the world's first cellular communication rebar tying tool that doesn't rely on Bluetooth for connection.

Connection is possible without turning on the power and this tool can be tracked for 30 days, even when the battery is removed. You can also lock out missing tools which aid in preventing theft.

FASTER TYING

The Connected TWINTIER's tying speed was reduced to less than 1/2 second. **Approximately 40% faster than the RB441T.**

LOAD ASSIST MECHANISM

New wire loading system automates wire loading for the tool.

EASY PULL TRIGGER

Reduced trigger effort is required, improving operation ergonomics.

TOOL SPECIFICATIONS

Weight	5.9 lbs. (with battery)
H x W x L	11 1/2" x 5 1/16" x 13"
Tying Speed	Less than 1/2 sec.
Tying Capacity	Wire Mesh x Wire Mesh to #7 x #7
Wire Series	TW1061T Series
Wire Diameter	19ga.
Ties Per Coil	Approx. 150 to 165 ties
Ties Per Charge	Approx. 4300
Coils Per Box	30
Battery	JPL91450A
Charger	JC925A
Voltage	DC 14.4V
Recharge Time	80% Capacity - 60 minutes 100% Capacity - 80 minutes
Standard Equipment	Battery, Charger, Belt Hook and Plastic Carrying Case

TW1061T TIE WIRE SERIES



19 ga. Steel Wire

19 ga. Poly Coated Wire

19 ga. Electro. Galv. Wire.

19 ga. Buy America Wire

TW1061T-S- STAINLESS STEEL WIRE IS ALSO AVAILABLE AS A SPECIAL ORDER ITEM.

205 Express St., Plainview, NY 11803

Phone: 800.223.4293 | FAX: 516.741.3272

www.maxusacorp.com

All MAX products are protected by registered patents and design rights including trademarks. For details, please contact MAX.

MAX

MAX USA CORP.

FEATURES

HOW THE WIRE
FEED SUPPORT
BUTTON WORKS



FACING
FRONT

FACING
BACK



50% LESS TRIGGER
EFFORT THAN
THE RB441T

1 CENTER MARKER

Easier to see and tie rebar cross section.

2 ENCLOSED DESIGN

Greater protection against debris and moisture entering the tool.

3 WIRE FEED SUPPORT

Helps the wire run smoothly to keep up with fast tying.

4 BELT HOOK

Hang the tool from your belt while not in use.

5 QUICKLY & EASILY LOAD TIE WIRE

Easily load the dual wire with new wire loading assist mechanism.

6 LIGHT TRIGGER

Short stroke trigger helps dispense the wire faster when trigger is pulled.

MULTIPLE REBAR COMBINATIONS

3 BARS



MINIMUM
#3x#3x#3

MAXIMUM
#7x#5x#5


4 BARS



MINIMUM
#3x#3x#3x#3

MAXIMUM
#5x#5x#4x#4

TIE WIRE BENDING MECHANISM
MAKES A SHORTER TIE HEIGHT

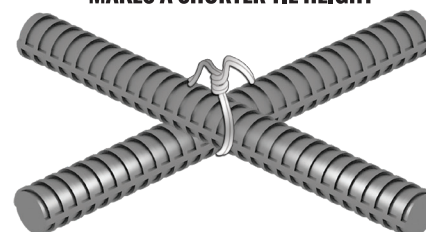

APPLICATIONS

Commercial Building, Foundations, Road Construction, Bridges, Precast Plants, Radiant Heating Tubes, Electrical Conduits, Tilt-up Construction, Pools, Basements, Sand Bags

DEALER: