

**MAX**

**TYNTIER®**

**RB613T**

**NEW**

**ENGINEERED FOR  
PERFORMANCE**

**TIES #5 x #5 TO #9 x #10**



**WORLD'S FIRST #9 x #10 REBAR TYING TOOL**

# MAX

## ENGINEERED FOR PERFORMANCE

# TWINTIER® RB613T

### BENEFITS

#### MAXIMIZE REBAR TYING

Features a larger jaw capacity than most battery-powered rebar tying tools for greater versatility on the job site. Ties up to #9 x #10 rebar

#### NEW FASTER TYING

The RB613T tying speed was reduced to approximately 1/2 second. Approximately 15% faster than the RB611T.

#### NEW LOAD ASSIST MECHANISM

New wire loading system automates wire loading for tool.

#### NEW EASY PULL TRIGGER

Reduced trigger effort is required, improving operational ergonomics.

#### BUILT TO LAST

The TWINTIER is built to last with durability that you can count on time and time again from MAX.

#### COST SAVINGS

The TWINTIER's Wire Pull-Back Mechanism dispenses the precise amount of wire needed to form a tie, reducing wire usage.

### TOOL SPECIFICATIONS

Weight	5.6 lbs. (With Battery)
H x W x L	11-1/2" x 4-7/8" x 14-3/16"
Tying Speed	Approx. 1/2 Sec.
Tying Capacity	#5 x #5 to #9 x #10
Wire Series	TW1061T Series
Wire Diameter	19ga.
Ties Per Coil	Approx. 115 to 205
Ties Per Charge	Approx. 5000
Coils Per Box	30
Battery	JPL91450A
Charger	JC925A
Voltage	DC 14.4V
Recharge Time	80% Capacity - 60 Minutes 100% Capacity - 80 Minutes
Standard Equipment	Battery, Charger, Belt Hook and Plastic Carrying Case

### TW1061T TIE WIRE SERIES



**TW1061T**  
Reg. Steel Wire



**TW1061T-USA**  
USA Steel Wire



**TW1061T-EG**  
Electro Galv. Wire



**TW1061T-PC**  
Poly. Coated Wire



**TW1061T-PC-USA**  
USA Poly. Coated Wire



**TW1061T-S**  
Stainless Steel Wire

### FEATURES



#### 1 NEW ARM SHAPE

Increased arm spacing by 5.6% compared to the previous model and angle change eases insertion and removal.

#### 2 CENTER MARKER

Easier to see and tie rebar cross section.

#### 3 ENCLOSED DESIGN

Greater protection against debris and moisture entering the tool.

#### 4 WIRE FEED SUPPORT

Helps the wire run smoothly to keep up with fast tying.

#### 5 BELT HOOK

Hang the tool from your belt while not in use.

#### 6 QUICKLY & EASILY LOAD TIE WIRE


Easily load the dual wire with new wire loading assist mechanism.

#### 7 LIGHT TRIGGER

Short stroke trigger helps dispense the wire faster when the trigger is pulled.

### MULTIPLE REBAR COMBINATIONS


#### 3 BARS



MINIMUM  
#3 x #3 x #3

MAXIMUM  
#11 x #6 x #6


#### 4 BARS



MINIMUM  
#3 x #3 x #3 x #3

MAXIMUM  
#8 x #8 x #5 x #5

TIE WIRE BENDING MECHANISM  
MAKES A SHORTER TIE HEIGHT

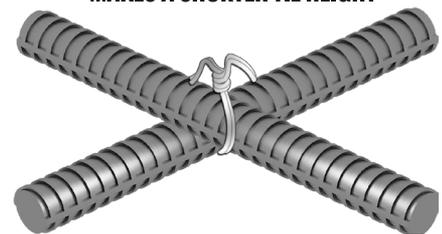

### APPLICATIONS

Commercial Buildings, Foundations, Road and Bridge Construction, Precast Plants, Retaining Walls, Electrical Conduits, Water Treatment Tanks, Basements, Water Retaining Structures, Radiant Tubing

# MAX

MAX USA CORP.

205 Express St., Plainview, NY 11803  
Phone: 800.223.4293 fax: 516.741.3272  
www.maxusacorp.com

All MAX products are protected by registered patents and design rights including trademarks. For details, please contact MAX.

DEALER: