

# SuperRoof<sup>®</sup>

# MAX<sup>®</sup>


## CN445R

### NEW

### drives 3/4" to 1-3/4" coil nails



#### FEATURES

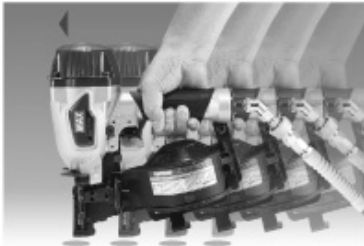


**Rapid fire**

- **Rapid fire trigger valve**  
CN445R comes with a rapid trigger valve. The CN445R is the fastest roofer on the market with little recoil.

Only **5.2 lbs**

- **Tar resistant nose (Patent pending)**  
The nose of the CN445R is designed to resist tar four times longer than conventional tools.

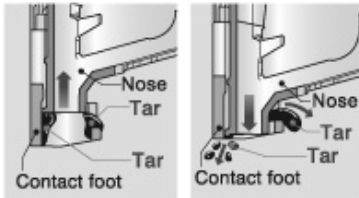

- **Removable contact foot**  
Easy to remove and clean, inexpensive to replace.



- **Powerful**  
Excellent for hard dried-out wood, metal valleys and re-roofing through several layers of shingles.


- **Unique tangle free swivel fitting**  
No more fighting with heavy hoses, no matter what angle the nailer is being held.



- **Nose magnet**  
Holds the last nail of the coil, preventing waste and jamming.



- **Full round driver blade**




- **Dial adjustable depth control**  
Dial depth control requires no special tools, providing accurate depth control the softest shingle to the hardest wood. No need to make any adjustments at the compressor.



- **Comfortable rubber grip**
- **Trigger lock for safety**

- **Maintenance free end cap filter (US Patent 5637125)**

It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.

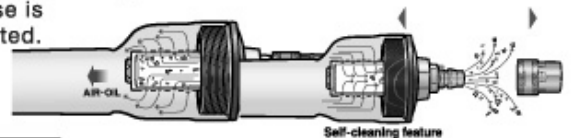

#### Optional parts

- Vinyl Siding Kit (CN70433)
- Sequential Trigger Kit (CN80535)
- Anti-Double Fire Trigger Kit (CN81159)




#### APPLICATIONS

- Asphalt shingles
- Siding
- Box assembly
- Metal to plywood

#### TOOL SPECIFICATIONS

MODEL	CN445R
WEIGHT	5.2 lbs
DIMENSIONS	10-1/2" (H) × 4-1/2" (W) × 12-3/16" (L)
LOAD CAPACITY	120 nails
OPERATING PRESSURE	70-100 psi (Regulator)
AIR CONSUMPTION	0.047ft <sup>3</sup> /cycle (100psi operating pressure)

#### FASTENERS APPLICABLE

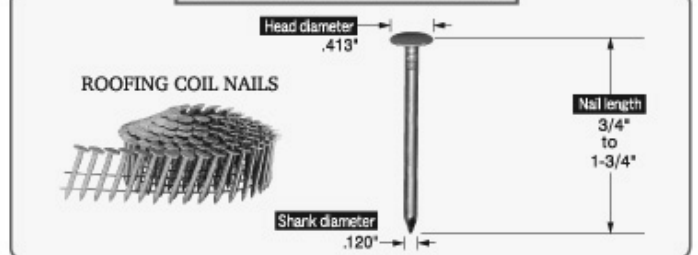

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

# MAX<sup>®</sup>

## MAX USA CORP.

257 East 2nd Street Mineola, New York 11501  
Phone: 800-223-4293 Fax: 516-741-3272  
www.maxusacorp.com

Dealer: